


DATASHEET

COMPARTMENT FLOOR WITH CEMENT SCREED

GD18.01

MEASUREMENT INCL. CONNECTORS, RESILIENT LAYER

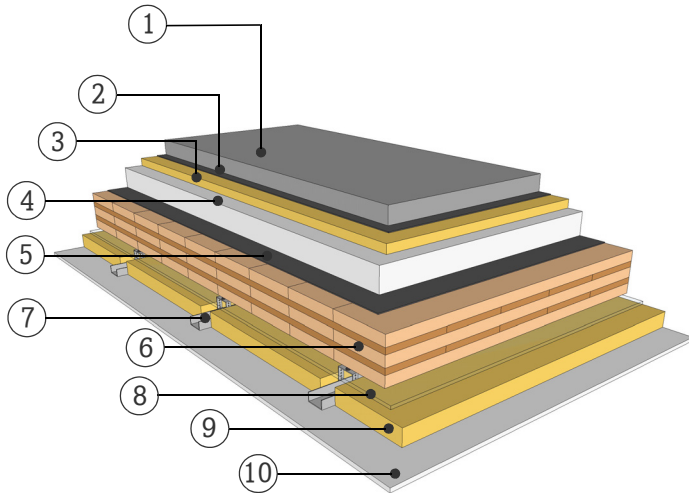

FIRE RESISTANCE

(R)EI 90 [min]

The fire resistance (R-criteria/structural resistance) up to 90 minutes applies for a maximum floor span of 4.2 m and given conditions with a fire exposure from one side. Should the planking material or the thickness deviate from stated information and a detailed examination of the actual load be required, please consult with a competent structural engineer of the KLH technical team.

SOUND INSULATION

R'_w (C;C_{tr}) 59 (-1;-4) [dB]

L'_{n,w} (C_i) 44 (1) [dB]

THERMAL CHARACTERISTICS

U 0,25 [W/m²K]

m_{w,B,A} 12/106 [kg/m²]

MATERIAL

PROPERTIES

[mm]		λ [W/mK]	μ min-max [-]	ρ [kg/m³]	c [kJ/kgK]	
①	60.0 Cement screed	1.4	50	2200	1.1	A1
②	Separating layer					
③	30.0 Impact sound insulation s'≤ 10 MN/m³	0.032	1	110	0.84	A1
④	80.0 Gravel fill bonded	0.9	10	1450-1600	1	A1
⑤	5.0 Acoustic sheet s'≤ 115 MN/m³	0.045	20000	1400	1	E
⑥	160.0 5s TL, KLH solid timber slab	0.12	50 - 300	500	1.6	D
⑦	60.0 Light weight C-profiles on resilient clips					A1
⑧	10.0 Air gap					
⑨	50.0 Mineral wool, low density	0.04	1	15-30	1	A1
⑩	12.5 Gypsum plasterboard	0.25	10	680	0.96	A2

Thickness 407,5 [mm]

Mass per squaremeter ca. 345 [kg/m²]

Test report sound: HFA 2440/2017-BB
Calculation of the physical values by the
KLH Massivholz GmbH, without warranty