


DATASHEET

PARTITION WALL

WTW16.02

TWO SEPARATE LAYER

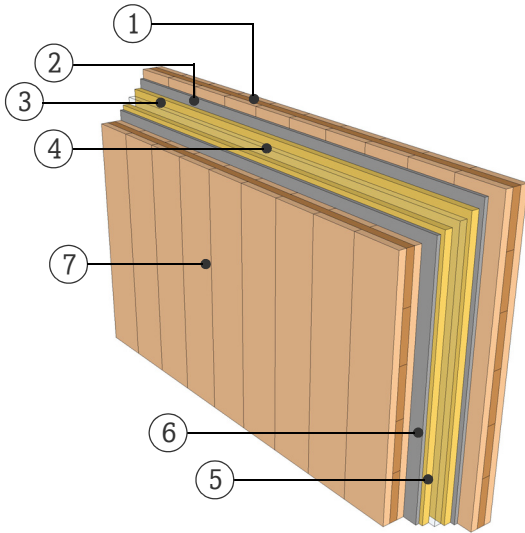

FIRE RESISTANCE

(R)EI 30 [min]

The fire resistance (R-criteria/structural resistance) up to 30 minutes applies for an effective wall height of 2.95 m with fire exposure from two sides. Should the planking material or the thickness deviate from stated information and a detailed examination of the actual load be required, please consult with a competent structural engineer of the KLH technical team.

SOUND INSULATION

R<sub>w</sub> (C;C<sub>tr</sub>) 66 (-4;8) [dB]

THERMAL CHARACTERISTICS

U 0,27 [W/m²K]

m<sub>w,B,A</sub> 36/36 [kg/m²]

MATERIAL

PROPERTIES

	[mm]		λ [W/mK]	μ min-max [-]	ρ [kg/m³]	c [kJ/kgK]	
①	95.0	3s TT, KLH solid timber slab	0.12	50 - 300	500	1.6	D
②	15.0	Cement bonded sandwich panel, Fermacell	0.4	40	1000	1	A1
③	30.0	Glasfiber with felt layer	0.032	1	40	0.81	A2
④	30.0	Air gap					
⑤	30.0	Glasfiber with felt layer	0.032	1	40	0.81	A2
⑥	15.0	Cement bonded sandwich panel, Fermacell	0.4	40	1000	1	A1
⑦	95.0	3s TT, KLH solid timber slab	0.12	50 - 300	500	1.6	D

Thickness 310,0 [mm]

Mass per square meter ca. 130 [kg/m²]

Test report sound: HFA 781a2016-BB  
Calculation of the physical values by the  
KLH Massivholz GmbH, without warranty